

BlueRack[™] 250 480 VDC Critical Power Battery Cabinet

Safe, Reliable, High-Power on Demand

Scalable Power Platform From kW to multi MW

- Breakthrough sodium-ion cells based on Prussian blue electrodes
- UL9540A 'Champion' rated nonflammable with no thermal runaway under any condition
- No thermal settling or waiting required after recharge
- No active cooling or fans necessary
- >50,000 discharge cycles
- Wide temperature operating range
- System controller is AC and/or DC powered
- Round-trip efficiency >97%
- No conflict materials
- Designed for critical power applications

Features



Rapid Cycle-Rate 100-0-100% SOC repeatedly with no wait, settling, or rest periods




Industry leading power capacity & performance



Nonflammable Chemistry & Construction Industry leading system-level availability




Introducing the Industry's Highest Power, Highest Cycle Life, Safest Battery*

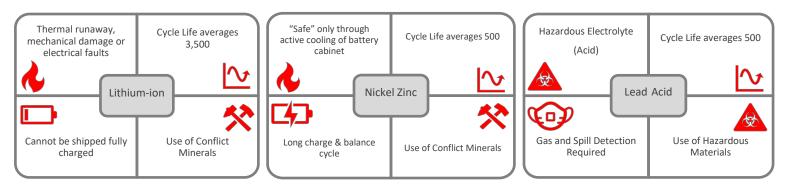

High Power

Over 250 kW sustained discharge


Power vs. Run Time

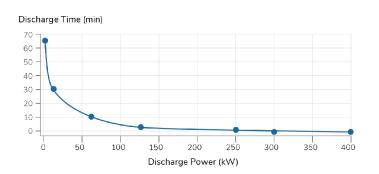

Fast Recharge

Full 0 to >99% recharge in just 15 minutes


Fast Charge Performance (16C,CC - CV)

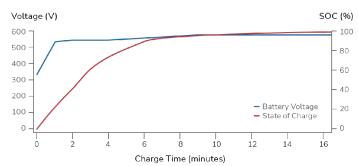



* Battle Hardened - Battery Packs and Cells survive ballistic penetration test with no fire, acid, or dangerous chemical exposure


Discharge Performance

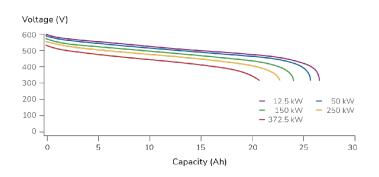

Long Life Cycle

Best-in-class cycle life: over 10 k cycles at >90% energy utilization

Cycle Life >90% Energy Utilization

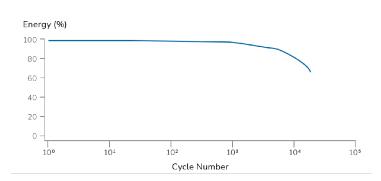


Our Sodium-ion Chemistry Is Inherently Safe and Fault Tolerant

- Nonflammable during and after nail penetration or flame test.
- No damage or loss in performance from short circuit or overcharge to 35% overvoltage.
- No Battery Management System necessary

250 kW Cabinet – 10 BluePacks[™] in Series



Cabinet Size: 1980mm x 630mm x 1080mm 78" H x 24.9" W x 42.4" D

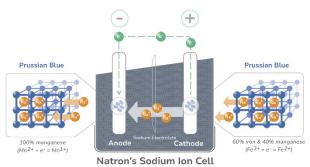


Charging Phase (Discharge Phase - The flow would reverse)

BluePack[™] Spec

48V, 25kW, 2 Minutes	
Voltage Rating Swing	58V to 38V
Maximum Current Rating	750 A
Size	37.4" L x 9.7" H x 10.6" W
Weight Approximately	165 lbs

Communication

External	MODBUS TCP/IP
Internal Communication	CAN Bus 2.0B 1 MBS

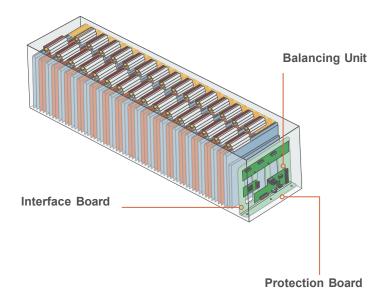



Specifications

Performance (from 25°C)

Run Time, Load	1 min	402 kW
	2 min	245 kW
	3 min	189 kW
	4 min	138 kW
	5 min	125 kW
0-99% Recharge Time	<14 min	
Energy, 1 hour (1C rate)	12.4 kWh	
Energy Efficiency (1C-1C)	>95%	
Coulombic Efficiency (1C-1C)	>97%	
Cycle Life (90% Energy Utilization)	>50,000	

Electrical

Nominal Voltage	480 Vdc
Recommended Float Voltage	580 to 590 Vdc
Operating Range	380 to 590 Vdc
Nominal Discharge Current	550 Amps
Maximum Discharge Current	750 Amps
Maximum Charge Current	750 Amps
	5.5 MW
Single System Parallel Capacity	
Inputs/Outputs	Dry Contact Closures

Thermal

Operating Temperature Range	-20° to +45° C
Maximum Current Operating Range	-20° to +40° C
Optimal (Consult factory for rating/duration)	+20° to +30° C

Monitoring and Communications

Parameters:	Voltage, Charge, Power, Temperature
Supported communication protocols	Modbus TCP/IP
Consult factory for other protocols	
Front Panel Display	Optional, future

Mechanical

Exterior Rack Dimensions (H x W x D)	1980 x 630 x 1080 mm 78.0 x 24.9 x 42.4 in
Mass	1080 kg / 2381 lbs
Seismic mounts available	
Top cable entry standard	

Applications

Uninterruptable Power Supply	Data Centers, Mission Critical Facilities
Telecom	Backup power on and off-grid sites
EV Fast Charging	
Fuel Cell	Bridging, power ramping, load balancing

Additional Information natron.energy/product



Contact:

General inquiries: info@natron.energy

Careers: jobs@natron.energy

Natron Energy, Inc. 3542 Bassett Street Santa Clara. CA 95054

About the company:

Natron Energy was founded by a group of Stanford scientists and engineers in 2012 to fulfill a singular mission: to offer safer, longer lasting batteries to underserved industrial and grid storage customers.

Today, Natron is a world leader in sodium-ion batteries and the first company to commercialize Prussian blue electrodes. Natron is a BABA qualified Made In America manufacturer.

