

BlueRack™ 250

480 VDC Industrial Power Battery Cabinet

Safe, Reliable, High-Power on Demand

Scalable Power Platform From kW to multi MW

- Breakthrough sodium-ion cells based on Prussian blue electrodes
- Full recharge in <15 minutes, ready immediately
 - No settling or thermal waiting required
- UL9540A 'Champion' rated nonflammable with no thermal runaway under any condition
- 50,000-100,000 discharge cycles depending on application
- Wide temperature operating range
- Twice the power of lithium
- Round-trip efficiency >97%
- Designed for behind-the-meter grid storage, peak shaving, load balancing and mission critical applications

Features

**Rapid Cycle-Rate**


100-0-100% SOC repeatedly with no wait, settling, or rest periods

**Industry leading power capacity & performance****Nonflammable Chemistry & Construction**

Industry leading system-level availability




Introducing the Industry’s Highest Power, Longest Life, Safest Battery*

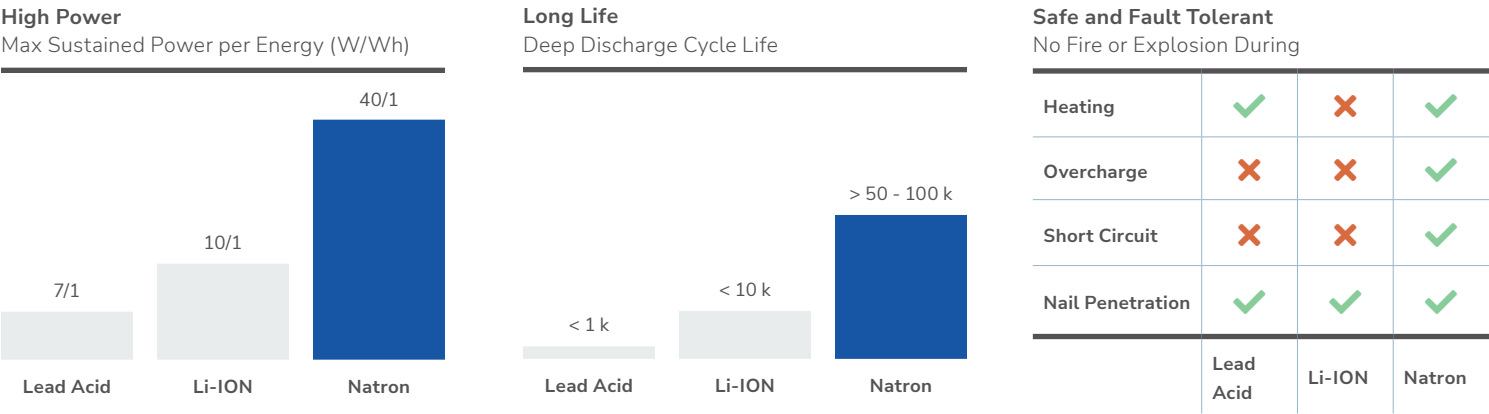


High Power

Over 250 kW sustained discharge

Power vs. Run Time

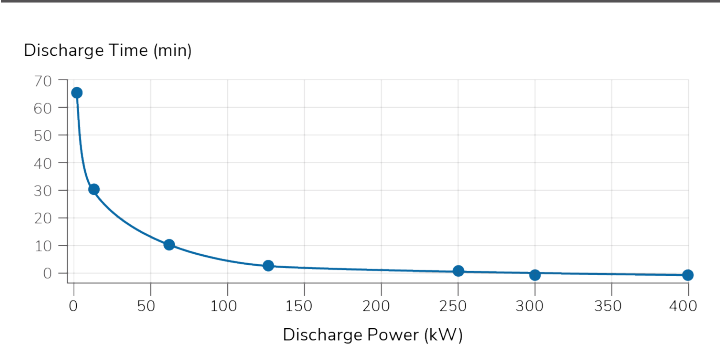


Discharge Performance

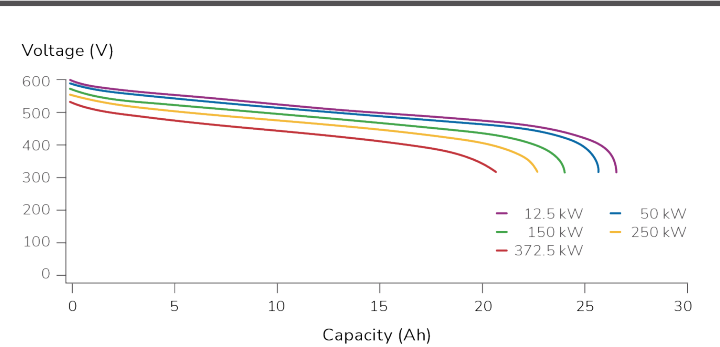

Fast Recharge

Full 0 to >99% recharge in just 15 minutes


Fast Charge Performance (16C,CC - CV)

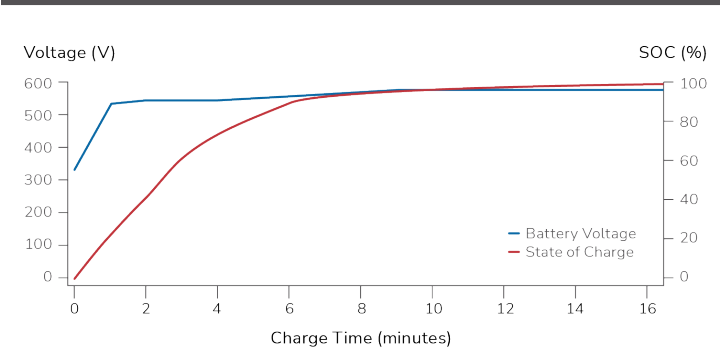

Long Life Cycle

Best-in-class cycle life: over 10 k cycles at >90% energy utilization


Cycle Life >90% Energy Utilization

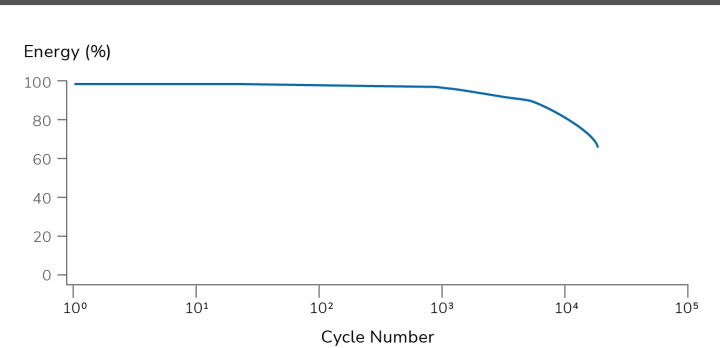

Preliminary specification subject to final product release.
* Battle Hardened – Battery Packs and Cells survive ballistic penetration test with no Fire, acid, or dangerous chemical exposure

Sodium-ion Inherently Safe and Fault Tolerant

- Nonflammable during and after nail penetration or flame test.
- No damage or loss in performance from short circuit or overcharge to 35% overvoltage.
- No rare-earth materials or caustic metals.

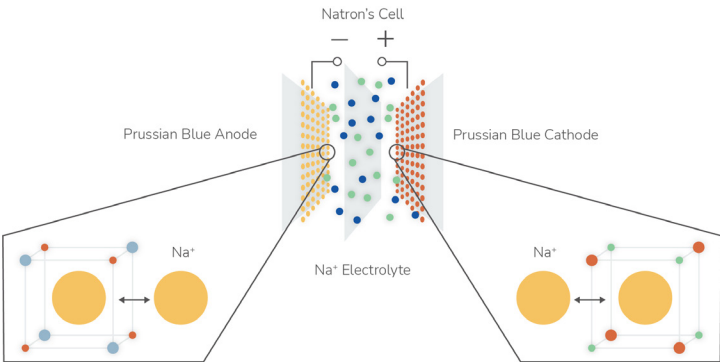

250 kW Cabinet




Based on the BluePack Battery

See BluePack datasheet for details

| | |
|------------------------|--|
| 48 V, 25 kW, 2 Minutes | |
| Voltage Rating Swing | 59 V to 32V |
| Maximum Current Rating | 800 A |
| Size | 246mm x 259mm x 951mm 9.7"H x 10.6" W x 37.4" D |
| Weight Approximately | 75kg / 165 lbs |

Communication

| | |
|------------------------|--------------------|
| External | MODBUS TCP/IP |
| Internal Communication | CAN Bus 2.0B 1 MBS |

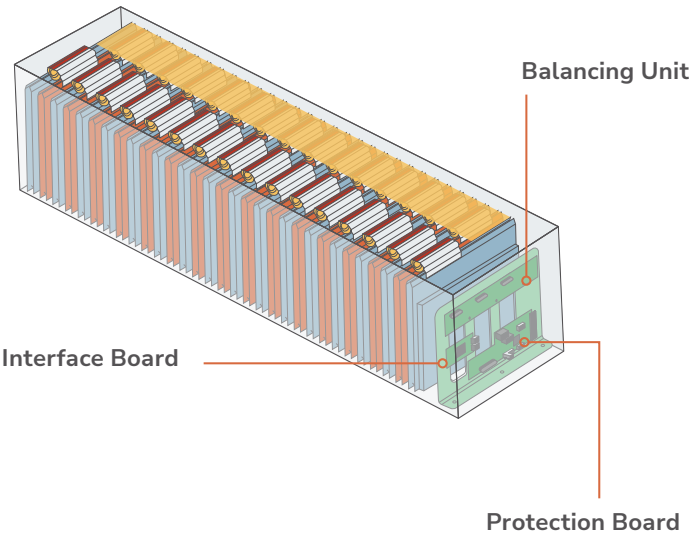

Cabinet Size: 1970mm x 660.4mm x 1170mm
77.6" H x 26" W x 46" D



Specifications

Performance

| | | |
|-------------------------------------|-------------------|--------|
| Run Time, Load | 1 min | 400 kW |
| | 2 min | 250 kW |
| | 3 min | 190 kW |
| | 4 min | 150 kW |
| | 5 min | 135 kW |
| 0-99% Recharge Time | <15 min | |
| Energy, 1 hour (1C rate) | 12.7 kWh | |
| Energy Efficiency (1C-1C) | >97% | |
| Coulombic Efficiency (1C-1C) | >98% | |
| Cycle Life (90% Energy Utilization) | >50,000 - 100,000 | |

Thermal

| | | |
|----------------------------------|--------------------------------|--|
| Operating Temperature Range | 0° to +45 °C / 32° to 113°F | |
| Transportation Temperature Range | -20° to +50° C / -58° to 122°F | |
| Nominal Temperature Range | -10° to 20°C / 50° to 68°F | |
| Humidity (Non-Condensing) | 10-90% Rh | |

Mechanical

| | | |
|--------------------------------------|---|--|
| Exterior Rack Dimensions (H x W x D) | 1970 x 660.4 x 1170 mm / 77.6 x 26 x 46 in | |
| Mass | 1080 kg / 2381 lbs | |
| Seismic mounts available | | |
| Top cable entry, others optional | | |
| Busbar/stud terminations | | |

Electrical

| | |
|---------------------------------|--------------------------|
| Nominal Voltage | 480 Vdc |
| Recommended Float Voltage | 580 to 590 Vdc |
| Operating Range | 320 to 590 Vdc |
| Survival Voltage Range | 0 to 800 Vdc |
| Maximum Discharge Current | 800 Amps |
| Maximum Charge Current | 800 Amps |
| Single System Parallel Capacity | 4.5 mW |
| | Nominal 12 13 for N+1 |
| Emergency Power Off (EPO) | Optional |

Monitoring and Communications

| | |
|--|---------------|
| Parameters: Battery, Voltage, Charge, Power, Temperature | |
| Supported communication protocols | Modbus TCP/IP |
| Consult factory for other protocols | |
| Front Panel Display | Optional |

Applications

| | |
|---|--|
| Power Generation & Distribution | Behind-the-meter grid storage, dark start, load balancing |
| Industrial | Peak load shaving, frequency stabilization |
| EV Fast Charging | Bridging from grid |
| Fuel Cell | Bridging, power ramping, load balancing |
| Behind-the-meter energy storage and grid services | |

Additional Information

[https://natron.energy/
resources/resource-library](https://natron.energy/resources/resource-library)

Contact:

General inquiries:
www.natron.energy Contact button

Careers: jobs@natron.energy

Natron Energy, Inc.
3542 Bassett Street
Santa Clara, CA 95054

About the company:

Natron Energy was founded by a group of Stanford scientists and engineers in 2012 to fulfill a singular mission: to offer safer, longer lasting batteries to underserved industrial and grid storage customers.

Today, Natron is a world leader in sodium-ion batteries and the first company to commercialize Prussian blue electrodes. Natron works with established pigment producers and Li-ion cell OEMs to deliver quality products via massively scalable manufacturing processes.